

NX-505-LED

Die-Cast LED Exit Signs with AC only

Source: 2W

Type _____

Project _____

Catalog No. _____

Notes _____

PRODUCT DESCRIPTION

Nora Lighting's compact, low profile LED exit signs are as brilliant and visible as standard incandescent signs, yet use a fraction of the power. LED light sources require no maintenance for 25 years—saving greatly on maintenance and upkeep costs. Nora Lighting's LED exits are ideal for commercial and industrial standard non-emergency applications where low maintenance and operating costs are a must.

ELECTRICAL

Voltage: 120/277VAC dual input

Wattage: 2W

Light Source: LED

Operating Temp: 10°C to 40°C (50°F to 104°F)

Circuitry Protection: Short circuit protection. Brown-out protection.

Construction: Brushed, die-cast aluminum, low profile, snap-together housing constructed of 20 gauge steel. Snap-out knock-outs for wiring.

Face: Two front faces sent with dual face unit, One face plate sent with single face unit. 6" high text with color diffusion.


Mounting: Exit sign can be mounted on a wall, side, or ceiling mounted (all mounting hardware included).

LABELS AND LISTINGS

- UL Listed
- NFPA
- NEC
- 5-year warranty on material and workmanship



PRODUCT IMAGES AND DIMENSIONS

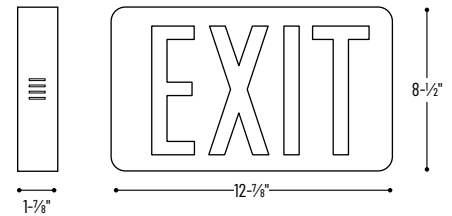

Die-Cast LED Exit Signs with AC only

| Catalog No. | Letter Color | Faces | Housing Color |
|-------------|-----------------------|-----------------------|-------------------------|
| NX-505-LED | /R = 6" Red Letters | (blank) = Single Face | (blank) = Black Housing |
| | /G = 6" Green Letters | /2F = Double Faces | |

Example: NX-505-LED/R = 6" Red Letters Die-Cast LED Exit Sign with AC only, Single Face, Black Housing